

INSTALLATION TECHNICIAN


PLEASE READ BEFORE INSTALLING
ANY ABSOLUTAIRE PRODUCTS

APPROXIMATE RIGGING WEIGHTS


MODEL NO.	BASE UNIT	O.A. FILTER	FILTERED MIXBOX	INLET HOOD	FILTERED INLET HOOD	LOUVERED INLET PLENUM	UPRIGHT O.A. PLENUM BASE	UPRIGHT SERV. PLATFORM
AA1700	350	75	CF	50	50	CF	125	250
AA3000	500	125	200	50	75	CF	150	250
AA1	800	150	275	75	100	CF	225	300
AA2	800	150	275	75	100	CF	225	300
AA3	975	200	375	75	100	CF	325	325
AA4	1,375	250	475	150	300	CF	450	375
AA5	2,325	350	650	325	500	CF	600	400
AA6	2,600	350	650	325	500	CF	600	400
AA7	4,125	500	1,050	450	725	CF	1,000	475
AA8	4,600	650	1,200	550	800	CF	1,100	525
R327	2,500	450	625	375	500	950	500	375
R330 – R336	2,750	525	825	450	625	1,300	700	325
R340	4,125	625	1,000	500	650	1,600	850	375
R344 – R349	4,500	750	1,250	625	800	2,050	1,150	500
R354	6,125	900	1,500	750	1,050	2,550	1,400	525
R360	6,550	1,000	1,750	850	1,125	3,000	1,600	550
*R366	4,400/3,600	1,125	2,050	900	1,200	3,500	2,000	600
*R373	4,900/4,100	1,300	2,400	1,000	1,400	4,000	2,250	650
*R380	7,600/5,900	1,500	2,600	1,200	1,600	4,550	2,500	700
*R389	7,900/6,100	1,600	2,900	1,250	1,750	5,700	2,800	725
*(2) PIECE HEATERS	FAN/BURNER							

CF = CONSULT FACTORY FOR WEIGHTS

RIGGING TIPS & GUIDELINES

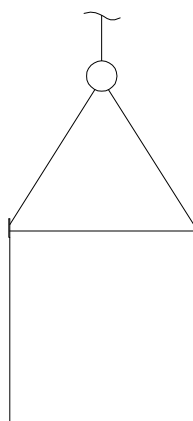


END VIEW
BASE UNIT

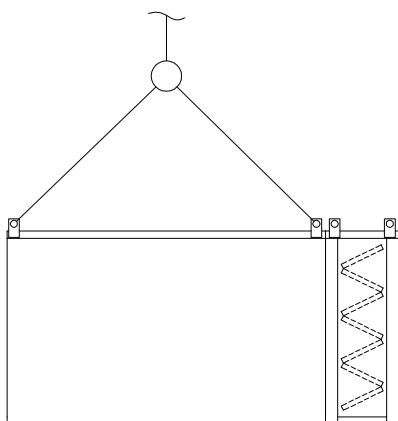


SIDE VIEW
BASE UNIT

O.A.
FILTER

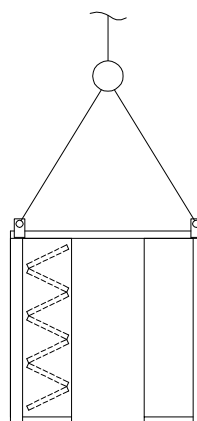

FILTERED
MIXBOX

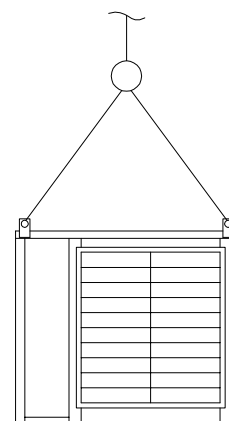

LOUVERED
INLET PLENUM

- NOTE:
- (1) O.A. FILTER SECTION, INLET HOOD & SERVICE PLATFORMS SHOULD BE FINAL ASSEMBLED TO "BASE" UNIT BEFORE LIFTING INTO PLACE.
 - (2) FILTERED MIXBOX, LOUVERED INLET PLENUM, DISCHARGE HEAD & ROOF CURB ARE RIGGED SEPARATE FROM THE "BASE UNIT" AND ASSEMBLED TO THE UNIT, ONCE IN PLACE.
 - (3) TWO-PIECE "BASE UNIT" MODELS SHOULD BE RIGGED SEPARATELY AND ASSEMBLED IN PLACE.
 - (4) ALL WEIGHTS ARE FOR STANDARD CONSTRUCTION -- CONSULT FACTORY FOR SPECIALS.